


High Pressure Gun

HP 1500S-V-E-24V

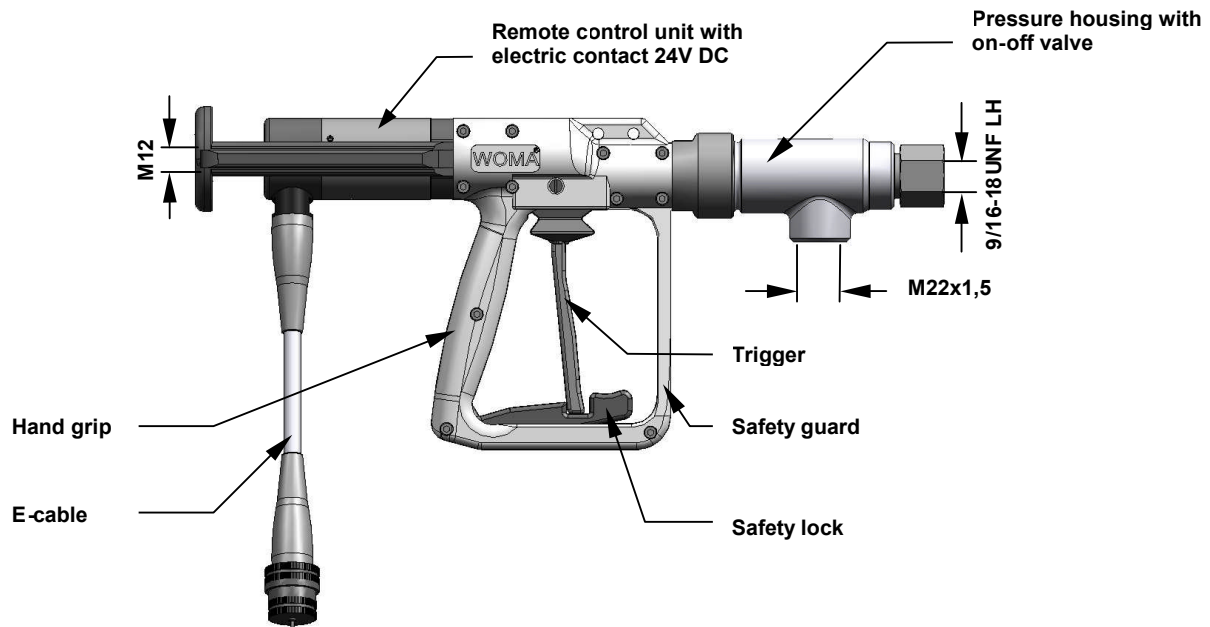

Description:

The HP 1500S-V-E-24V is a positive shutoff type high pressure jetting gun which incorporates an internal on/off valve and low voltage micro switch into its design.

Standard equipment includes; a trigger safety guard and latching trigger lock to prevent unintentional use, forged steel pressure housing and light weight polymerized hand grip.

Advantages:

High safety standard.

Turnable hand grip for easy operation.

Full encapsulated polymerized hand grip offers high tensile strength and excellent resistant to most chemicals.

All functional parts are protected from dirt and water invasion.


Technical data:

Part-No. :	001.1569
Operating pressure:	max. 1500 bar
Medium temperature:	max. + 100°C
Recoil force perm. without body support:	max. 150 N
Recoil force perm. with body support:	max. 250 N
Pressure loss:	5 bar at 30 l/min
Weight:	appr. 3,0 kg
Overall length:	appr. 460 mm
Overall height:	appr. 196 mm
Overall width:	appr. 72 mm

HP 1500S-V-E-24V - Components

Nozzle connection	
Part-No.	for nozzle form
010.7275	1 and 8
010.8086	4 and 19
180.1702	21

Nozzle pipe for nominal length L	Weight	C
Part-No. L (mm)	kg	
445.3346 300	0,26	9/16" - 18UNF LH
445.3347 500	0,43	
445.3348 750	0,64	
445.3349 1000	0,85	
445.3584 1500	1,30	
445.3350 2000	1,69	
445.3351 3000	2,53	
445.3352 4000	3,37	
445.3353 5000	4,21	
445.3354 6000	5,05	
445.4555 7000	5,89	

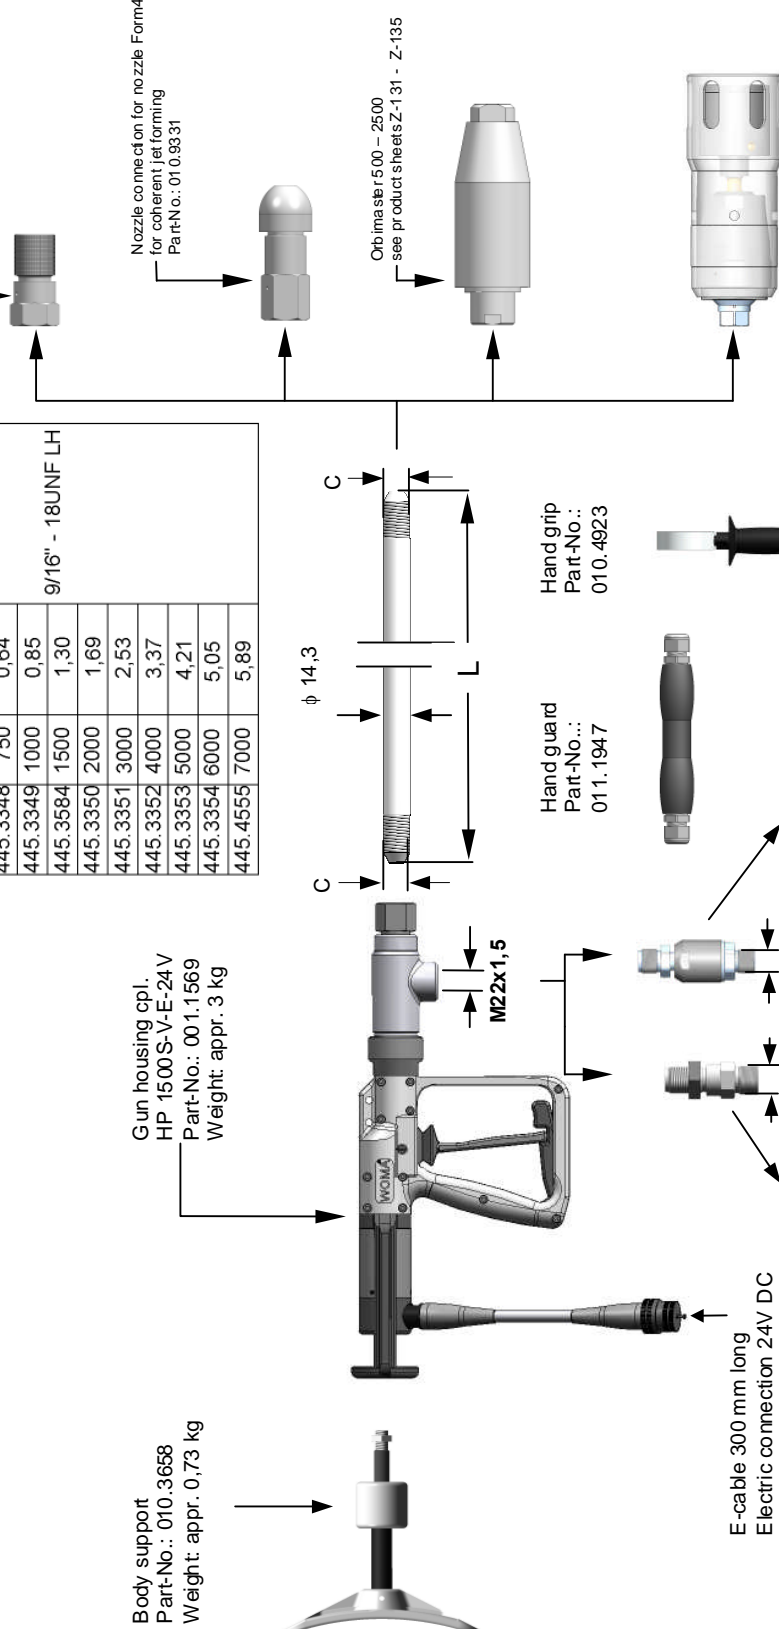

Gun housing cpl.
 HP 1500S-V-E-24V
 Part-No.: 001.1569
 Weight: appr. 3 kg

Body support
 Part-No.: 010.3658
 Weight: appr. 0,73 kg

Nozzle connect on for nozzle Form4 for coherent jet forming
 PartNo.: 01.0.9331

Orbitasprayer 500 - 2500 see product sheets Z-131 - Z-135

Hand grip Part-No.: 010.4923

Hand guard Part-No.: 011.1947

Turnable hose connection

Part-No.	B
011.0716	M22x1,5 60°DK
011.0717	M24x1,5 24°DK
011.0718	G 1/2 60°DK

Hose connection

Part-No.	A
010.7911	M22x1,5 24°DK
010.7912	M22x1,5 60°DK
010.7913	M24x1,5 24°DK
010.7914	G 1/2 A 60°DK
010.7915	G 3/4 A 60°DK

Turbo nozzle TD1000 TD2000 see product sheets Z-147 - Z-148

E-cable 300 mm long
 Electric connection 24V DC