


Floormaster[®] FM 1000-E-24V

Operating pressure **1000 bar**

Medium temperature **100°C**

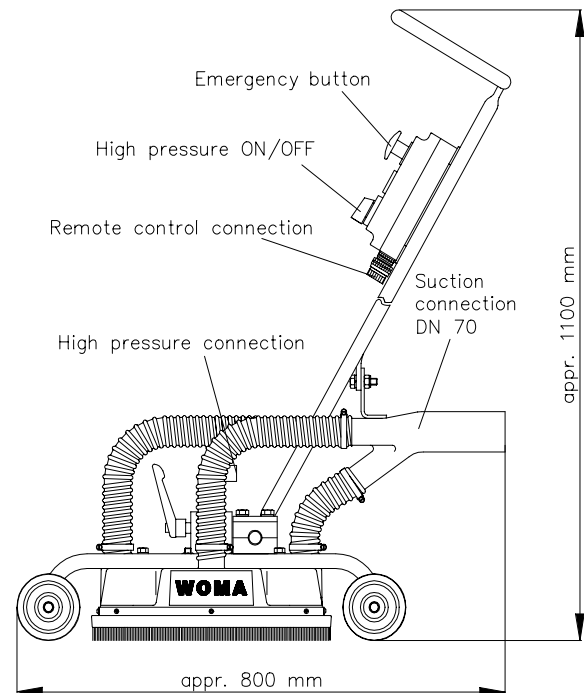

Description:

The Floormaster[®] is intended for the use as floor cleaning unit which, in connection with a suction device, cleans and disposes simultaneously in a nonpolluting way.

The high temperature resistant up to 100°C makes the Floormaster[®] in connection with WOMA Ecotherm[®] units to an extremely efficient water tool.

Advantages:

When using a suction device a separate disposal of suspension risen from cleaning is not necessary.

Height adjustment for spray bar

Speed control by nozzle adjustment

Accessories:

High pressure connection aM22x1,5 WGA PN 010.9671
WGA = special hand-screwed connection

O-Ring for nozzle Form 4 and 19 PN 280.0036

Technical data:

Part No.		001.1560
Operating pressure	max.	1000 bar
Medium temperature	max.	100°C
Weight	appr.	23kg
Working width	appr.	300mm
Speed spray bar	max.	1500 1/min
No. of nozzles		2 pieces
Recommended nozzles	or	Form 4 round jet Form19 fan jet
High pressure connection		aM24x1,5 24°DK
Control voltage		24V DC

Recommended nozzle diameter at:

500 bar and 33 l/min		
2 x 1,10 mm	Form 4	PN 340.0428
2 x 1,20 mm	Form 19 30°	PN 340.1911
800 bar and 21 l/min		
2 x 0,70 mm	Form 4	PN 340.0424
2 x 0,80 mm	Form 19 30°	PN 340.1979