





Wasser als Werkzeug für eine saubere Umwelt

FlexLanceMaster®

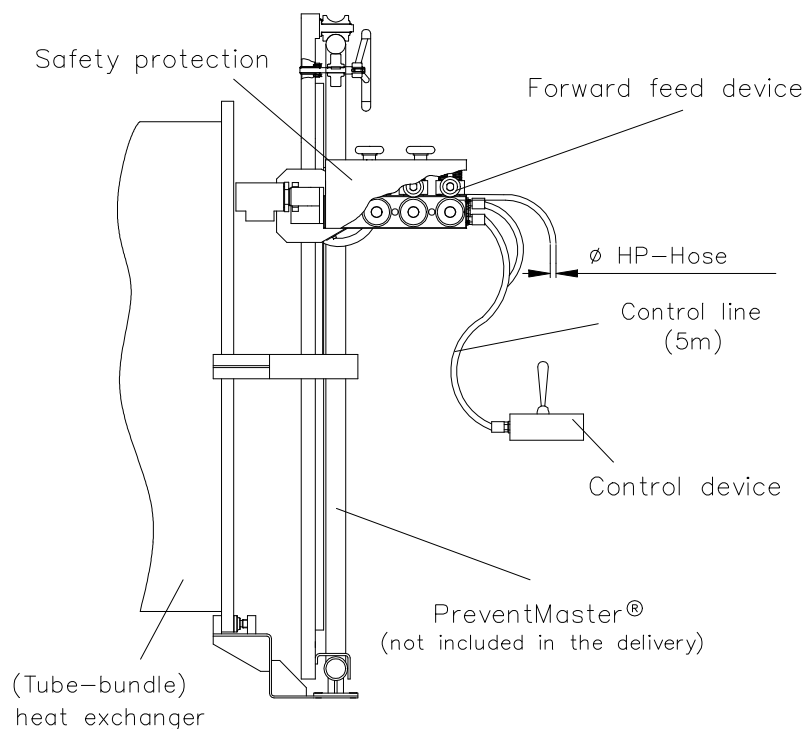

Description:

The FlexLanceMaster® is an add-on option to the PreventMaster® SFV 1200-1 .

With this device the HP-Hose feed and extraction in the heat exchanger can be controlled remotely.

Advantages:

- Design tested safety equipment by the Employers Liability Insurance Association. Mark of Conformity: 01120
- Highest possible degree of safety standard
- Low energy consumption
- The feed rate is pneumatically adjustable
- Easy installation

Operating data:

The air motor requires clean, dry air.
WOMA recommends the use of an air filter / conditioning unit Part-No. 010.8955

Technical data:

| | | |
|-----------------|---|-----------------------|
| Part-No | : | 001.1400 |
| Feed rate | : | max. 8 m/min |
| Air consumption | : | 468 L/min bei 6,3 bar |
| Air pressure | : | min 3 bar |
| | : | max. 7 bar |
| Weight | : | ca. 12 kg |

| Roller Set * | |
|--------------|-------------------------------|
| Part-No. | Outer diameter of the hose mm |
| 010.9257 | Ø 7,7 – Ø 8,0 |
| 010.9256 | Ø 9,5 – Ø 9,8 |
| 010.9255 | Ø 10,7 – Ø 11,0 |
| 010.9254 | Ø 11,5 – Ø 11,8 |
| 010.9253 | Ø 12,6 – Ø 12,9 |
| 010.9252 | Ø 13,0 – Ø 13,3 |
| 010.9251 | Ø 15,0 – Ø 15,3 |
| 010.9250 | Ø 16,9 – Ø 17,2 |

* must be ordered separately

