

WOMA®

VACUJET

VJ 2500-1-PN


for pneumatic control

Vacujet 2500-1-PN
with sealing lip

PN 001.1101

Vacujet 2500-1-PN
with brush

PN 001.1102

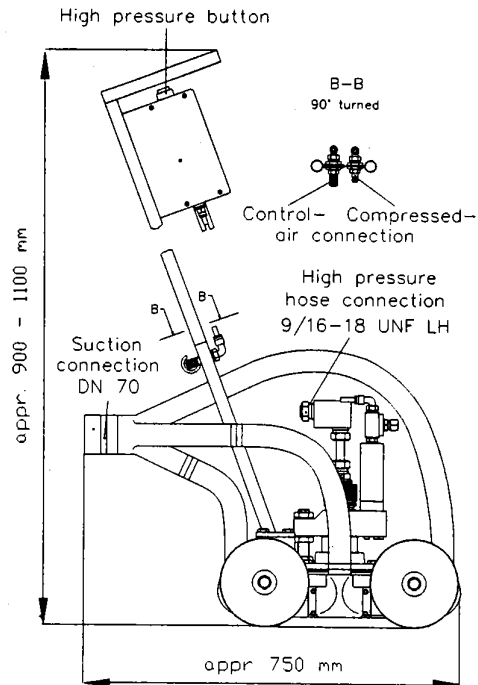

Description:

The Vacujet 2500-1-PN is intended for the use as floor cleaning unit which, in connection with a suction device, cleans and disposes simultaneously in a nonpolluting way.

Depending on requirement to the ground sealing the Vacujet can be equipped with a brush or in case of highest requirements to density with a sealing lip.

Advantages:

- When using a suction device a separate disposal of suspension risen from cleaning is not necessary.
- Speed adjustable by air pressure and air quantity
- Parts under pressure made of high-tensile stainless steel
- Retrofit kit for fan jet nozzle form 9 (max. 2000 bar) PN 010.7963

Operating information:

The air motor is only to be used with dry, clean and lubricated air.

We recommend WOMA pressurized air maintenance unit PN 010.8955.

Technical data:

Operating pressure	: max.	2500 bar
Overall width	: appr.	440 mm
Working width	: appr.	225 mm
Weight	: appr.	36,0 kg
Speed Spray bar	: max.	2500 1/min
Air consumption	: :	0,52m ³ /min at 6 bar
Air pressure	: max.	7 bar
No. of nozzles	: max.	8 pieces
Recommended nozzles	: :	* form 13 / form 21

Recommended nozzle diameters at:

2000 bar and 16 l/min		
8 x 0,30mm	form 21	PN 340.2133
2000 bar and 20 l/min		
8 x 0,35 mm	form 21	PN 340.2134
2500 bar and 15 l/min		
8 x 0,25 mm	form 21	PN 340.2132

* When using the nozzle form 13, 8 nozzle holding screws PN 160.3593 should be ordered separately.